

# SINEAX G536

## Phase Angle or Power Factor Transducer

Carrying rail housing P13/70



### Application

The transducer **SINEAX G536** (Fig. 1) measures the phase angle or power factor between current and voltage of a single or 3-phase balanced network having a sine wave form.

The output signal, in the form of a **load independent** DC current or voltage, is proportional to the phase angle resp. power factor between the 2 measured quantities current and voltage.

The transducer fulfills all the important requirements and regulations concerning electromagnetic compatibility **EMV** and **Safety** (IEC 1010 resp. EN 61 010). It was developed and is manufactured and tested in strict accordance with the **quality assurance standard** ISO 9001.




Fig. 1. Transducer SINEAX G536 in housing P13/70 clipped onto a top-hat rail.

### Features / Benefits


- Measuring input: Sine, rectangular or distorted wave forms of input quantities with dominant fundamental wave
- | Measured variables          | Nominal input current | Nominal input voltage | Measuring range limits                |
|-----------------------------|-----------------------|-----------------------|---------------------------------------|
| Phase angle or power factor | 0.5 to 6 A            | 10 to 690 V           | Min. span 20 °el<br>Max. span 360 °el |
- Measuring output: Unipolar, bipolar or live zero output variables
  - Measuring principle: Measurement of the zero crossing interval
  - AC/DC power supply / Universal
  - Standard as marine version per Lloyd's Register of Shipping

### Measuring input →

Examples of measuring ranges with  $\varphi$ -linear output

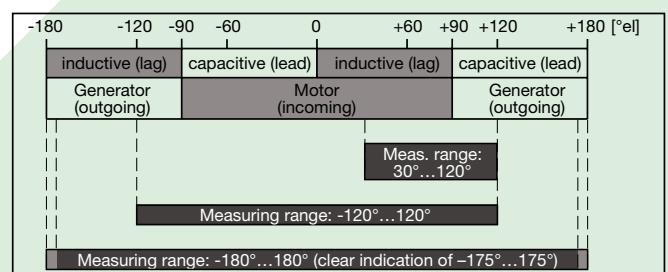

Examples of measuring ranges with  $\cos\varphi$ -linear output

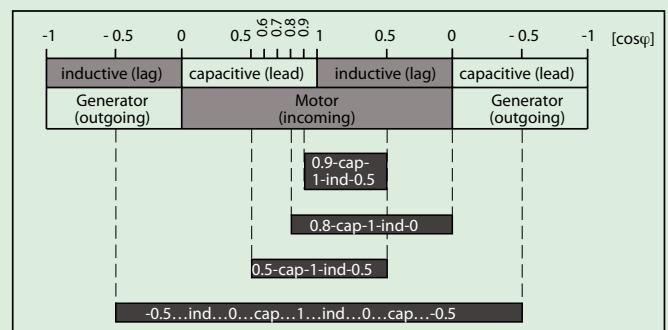

Nominal frequency  $f_N$ : 16 2/3 ... 400 Hz

### Technical data

#### General

- Measured quantity: Phase angle or power factor between current and voltage
- Measuring principle: Measurement of the zero crossing interval

# SINEAX G536

## Phase Angle or Power Factor Transducer

Nominal input voltage  $U_N$ : 10 ... 690 V  
(max. 230 V with power supply from voltage measuring input)

Response sensitivity: 10 ... 120%  $U_N$

Nominal input current  $I_N$ :  $\geq 0.5$  to 6.0 A

Response sensitivity:  $< 1\%$   $I_N$

Own consumption:  $< 0.1$  VA per current path  
 $U_N \cdot 1.5$  mA per voltage path

Overload capacity:



Input variables $I_N, U_N$	Number of applications	Duration of one application	Interval between two successive applications
$1.2 \times I_N$	—	continuously	—
$20 \times I_N$	10	1 s	100 s
$1.2 \times U_N^1$	—	continuously	—
$2 \times U_N^1$	10	1 s	10 s

<sup>1</sup> But max. 264 V with power supply from voltage measurement

### Measuring output

Load-independent DC current:	0 ... 1 to 0 ... 20 mA resp. live-zero 1 ... 5 to 4 ... 20 mA $\pm 1$ to $\pm 20$ mA
Burden voltage:	+ 15 V, resp. - 12 V
Load-independent DC voltage:	0 ... 1 to 0 ... 10 V resp. live-zero 0.2 ... 1 to 2 ... 10 V $\pm 1$ to $\pm 10$ V
Load capacity:	Max. 4 mA
Voltage limit under $R_{ext} = \infty$ :	$\leq 25$ V
Current limit under overload:	Approx. 30 mA
Residual ripple in output current:	< 0.5% p.p.
Nominal value of response time:	4 periods of the nominal frequency
Other ranges:	2, 8 or 16 periods of the nominal frequency

### Output characteristic

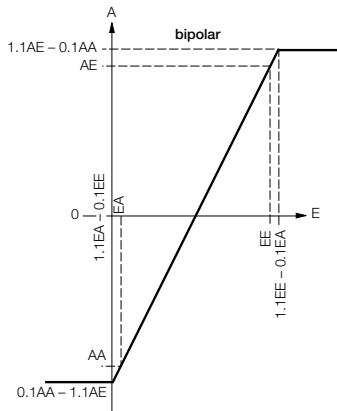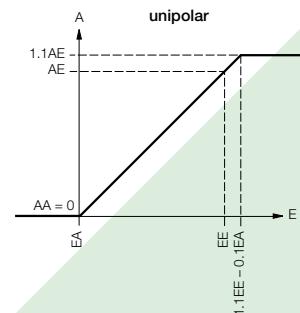

Legend:  
*E* = Input  
*EA* = Input start value  
*EE* = Input end value  
*A* = Output  
*AA* = Output start value  
*AE* = Output end value

### Accuracy (acc. to EN 60 688)

Reference value:  $\Delta\varphi = 90^\circ$  resp.  $\Delta\cos\varphi = 0.5$   
Basic accuracy: Class 0.5

### Reference conditions


Ambient temperature	15 ... 30 °C
Input current	0.8 ... 1.2 $I_N$
Input voltage	0.8 ... 1.2 $U_N$
Frequency	$f_N \pm 10\%$
Wave forms	Sine wave
Power supply	At nominal range
Output burden	$\Delta R_{ext}$ max.

### Additional errors (maxima):

Voltage influence between 0.5 and 1.5 $U_N$	$\pm 0.3\%$
Current influence between 0.4 and 1.5 $I_N$	$\pm 0.3\%$
between 0.1 and 1.5 $I_N$	$\pm 0.5\%$

### Safety

Protection class:	II (protection isolated, EN 61 010)
Housing protection:	IP 40, housing (test wire, EN 60 529) IP 20, terminals (test finger, EN 60 529)
Contamination level:	2
Oversupply category:	III
Rated insulation voltage (against earth):	230 V resp. 400 V, inputs 230 V, power supply 40 V, output
Test voltage:	50 Hz, 1 min. acc. to EN 61 010-1 3700 resp. 5550 V, inputs versus all other circuits as well as outer surface

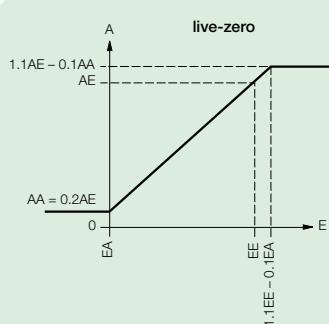

# Phase Angle or Power Factor Transducer

Test voltage (continuation):	3250 V, input circuits versus each other
	3700 V, power supply versus output as well as outer surface
	490 V, output versus outer surface

## Power supply →○

AC/DC power pack (DC or 50/60 Hz)

Table 1: Rated voltages and permissible variations

Rated voltage	Tolerance
85 ... 230 V DC, AC	DC – 15 ... + 33%
24 ... 60 V DC, AC	AC ± 15%

or

Power supply from voltage measuring input: 24...60 V AC or 85...230 V AC

Option: Connect to the low tension to terminals 12 and 13  
24 V AC or 24 ... 60 V DC

Power consumption: 3 VA

## Installation data

Mechanical design: Housing P13/70

Material of housing: Lexan 940 (polycarbonate), flammability Class V-0 acc. to UL 94, self-extinguishing, non-dripping, free of halogen

Mounting: For rail mounting

Mounting position: Any

Weight: Approx. 0.24 kg

## Connecting terminals

Connection element: Screw-type terminals with indirect wire pressure

Permissible cross section of the connection leads:  $\leq 4.0 \text{ mm}^2$  single wire or  $2 \times 2.5 \text{ mm}^2$  fine wire

## Environmental conditions

Operating temperature: – 10 to + 55 °C

Storage temperature: – 40 to + 70 °C

Relative humidity:  $\leq 75\%$ , no dew

Altitude: 2000 m max.

Indoor use statement!

## Ambient tests

EN 60 068-2-6: Vibration

Acceleration:  $\pm 2 \text{ g}$

Frequency range: 10 ... 150 ... 10 Hz, rate of frequency sweep: 1 octave/minute

Number of cycles: 10, in each of the three axes

EN 60 068-2-27: Shock

Acceleration: 3  $\times$  50  
3 shocks each in 6 directions

EN 60 068-2-1/-2/-3: Cold, dry heat, damp heat

IEC 1000-4-2/-3/-4/-5/-6  
EN 55 011: Electromagnetic compatibility

## Germanischer Lloyd

Type approval certificate: No. 12 261-98 HH

Ambient category: C

Vibration: 0.7 g

Table 2: Specification and ordering information

Description	*Blocking code	no-go with blocking code	Article No./Feature
SINEAX G536	Order Code 536 - xxxx xxxx xx		536 –
Features, Selection			
<b>1. Mechanical design</b>			
Housing P13/70 for rail mounting			4
<b>2. Measuring mode</b>			
For phase angle ( $\varphi$ -linear)	A		1
For power factor ( $\cos\varphi$ -linear)	B		2

# SINEAX G536

## Phase Angle or Power Factor Transducer

Description	*Blocking code	no-go with blocking code	Article No./Feature
<b>SINEAX G536</b>	<b>Order Code 536 - xxxx xxxx xx</b>		536 -
<b>Features, Selection</b>			
<b>3. Application</b>			
Single-phase AC			1
U: L1 & L2      I: L1	3 or 4-wire 3-phase balanced load		2
U: L2 & L3      I: L2	3 or 4-wire 3-phase balanced load		3
U: L3 & L1      I: L3	3 or 4-wire 3-phase balanced load		4
U: L1 & L3      I: L1	3 or 4-wire 3-phase balanced load		5
U: L2 & L1      I: L2	3 or 4-wire 3-phase balanced load		6
U: L3 & L2      I: L3	3 or 4-wire 3-phase balanced load		7
U: L1 & L2      I: L3	3 or 4-wire 3-phase balanced load		A
U: L2 & L3      I: L1	3 or 4-wire 3-phase balanced load		B
U: L3 & L1      I: L2	3 or 4-wire 3-phase balanced load		C
<b>4. Nominal input frequency</b>			
50 Hz			1
60 Hz			2
Non-standard ≥ 10 to 400 Hz	[Hz]		9
With power supply from measuring input min. 40 Hz			
<b>5. Nominal input voltage</b>			
$U_N = 100 \text{ V}$	C		1
$U_N = 230 \text{ V}$	C		2
$U_N = 400 \text{ V}$	D		3
Non-standard ≥ 10 to 690 V	[V]		9
With power supply from measuring input min. 24 V, max. 230 V, see feature 9, lines 3 and 4			
3-phase system: Input voltage = phase to phase voltage			
<b>6. Nominal input current</b>			
1 A			1
5 A			2
Non-standard ≥ 0.5 to 6.0 A	[A]		9
<b>7. Measuring range</b>			
Phase angle – 60 ... 0 ... + 60 °el			B
$\cos\phi$ 0.5 ... cap ... 1 ... ind ... 0.5			A
Non-standard [°el] or [ $\cos\phi$ ]			9
Measuring range within – 180 ... 0 ... + 180 °el or – 1 ... ind ... 0 ... cap ... 1 ... ind ... 0 ... cap ... – 1, but clear indication only to – 175 ... 0 ... + 175 °el			
Measuring span ≥ 20 °el			
<b>8. Output signal</b>			
0 ... 20 mA			1
4 ... 20 mA			2
Non-standard 0 ... 1.00 to 0 ... < 20, – 1.00 ... 0 ... 1.00 to – 20 ... 0 ... 20 (symmetrical)	[mA]		9
1 ... 5 to < (4 ... 20) (AA / AE = 1 / 5)			
0 ... 10 V			A
Non-standard 0 ... 1.00 to 0 ... < 10, – 1.00 ... 0 ... 1.00 to – 10 ... 0 ... 10 (symmetrical)	[V]		Z
0.2 ... 1 to 2 ... 10 (AA / AE = 1 / 5)			
AA = Output start value, AE = Output end value			







# SINEAX G536




## Phase Angle or Power Factor Transducer

Description	*Blocking code	no-go with blocking code	Article No./Feature
<b>SINEAX G536</b>	<b>Order Code 536 - xxxx xxxx xx</b>		536 -
<b>Features, Selection</b>			
<b>9. Power supply</b>			
85 ... 230 V DC, AC			1
24 ... 60 V DC, AC			2
Internal from measuring input (24 ... 60 V AC)		C	3
Internal from measuring input (85 ... 230 V AC)		CD	4
Connect to the low tension 24 V AC / 24 ... 60 V DC			5
<b>10. Response time</b>			
4 periods of the input frequency (standard)			1
2 periods of the input frequency			2
8 periods of the input frequency			3
16 periods of the input frequency			4

\* Lines with letter(s) under "no-go" cannot be combined with preceding lines having the same letter under "SCODE".

### Application notes

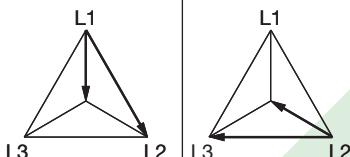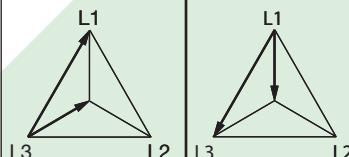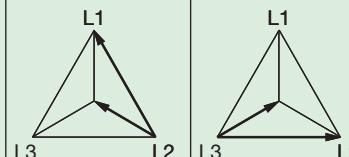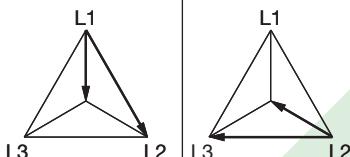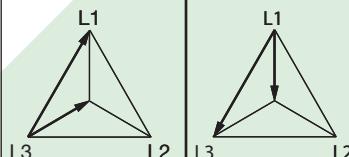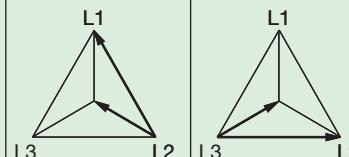Current connection in phase	L1	L2	L3	L1	L2	L3
Voltage connection between	L1 & L2	L2 & L3	L3 & L1	L1 & L3	L2 & L1	L3 & L2
Vector diagrams						

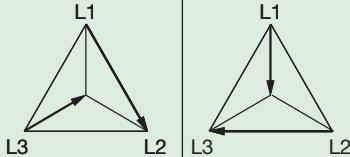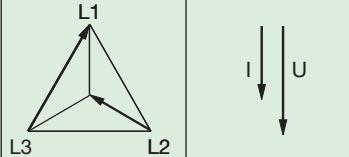Current connection in phase	L3	L1	L2	L
Voltage connection between	L1 & L2	L2 & L3	L3 & L1	L & N
Vector diagrams				

# SINEAX G536

## Phase Angle or Power Factor Transducer

### Electrical connections

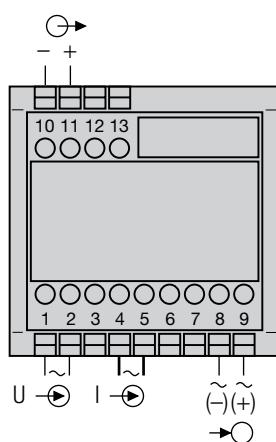


Fig. 2. Power supply connected to terminals 8 and 9.

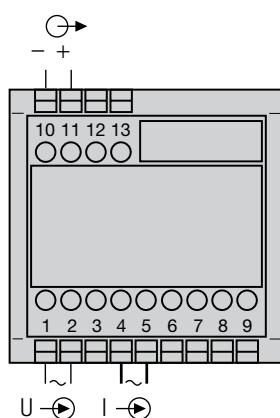


Fig. 3. Power supply internal from measuring input, without separated power supply.

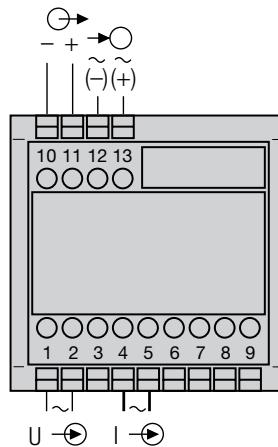


Fig. 4. Power supply connected to the low tension terminal side 12 and 13.

- = Measuring input
- = Measuring output
- = Power supply

Measuring inputs			
Application	Terminal allocation	Application	Terminal allocation
Phase angle or power factor measurement in single-phase AC network		Phase angle or power factor measurement in 3 or 4-wire 3-phase network U: L1 & L2 I: L1	
Phase angle or power factor measurement in 3 or 4-wire 3-phase network U: L2 & L3 I: L2		Phase angle or power factor measurement in 3 or 4-wire 3-phase network U: L3 & L1 I: L3	
Phase angle or power factor measurement in 3 or 4-wire 3-phase network U: L1 & L3 I: L1		Phase angle or power factor measurement in 3 or 4-wire 3-phase network U: L2 & L1 I: L2	
Phase angle or power factor measurement in 3 or 4-wire 3-phase network U: L3 & L2 I: L3		Phase angle or power factor measurement in 3 or 4-wire 3-phase network U: L1 & L2 I: L3	

# Phase Angle or Power Factor Transducer

Measuring inputs			
Application	Terminal allocation	Application	Terminal allocation
Phase angle or power factor measurement in 3 or 4-wire 3-phase network U: L2 & L3 I: L1		Phase angle or power factor measurement in 3 or 4-wire 3-phase network U: L3 & L1 I: L2	

## Dimensional drawing

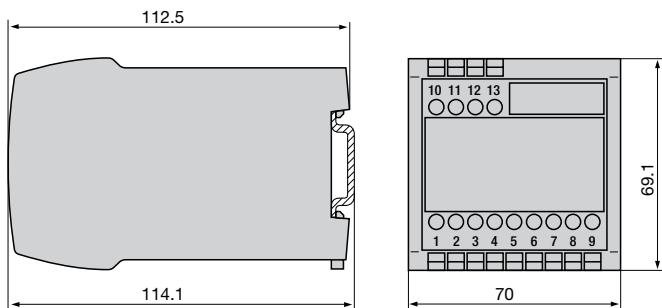


Fig. 5. Housing P13/70 clipped onto a top-hat rail (35 x 15 or 35 x 7.5 mm, acc. to EN 50 022).

## Standard accessories

1 Operating instructions in three languages: German, French, English

 **CAMILLE BAUER**  
Rely on us.

Camille Bauer Ltd.  
Aargauerstrasse 7  
CH-5610 Wohlen / Switzerland  
Phone: +41 56 618 21 11  
Fax: +41 56 618 21 21  
[info@camillebauer.com](mailto:info@camillebauer.com)  
[www.camillebauer.com](http://www.camillebauer.com)